

Effective Date : 01-03-09
 V A T 12.5% EXTRA
 PRICES ARE SUBJECT TO CHANGE WITHOUT NOTICE

Mercantile Electric Corporation


154, Lohar Chawl, K. Sharma Marg, Lohar Chawl, Mumbai - 400 002.
 E Mail : mec1962@hotmail.com Website : www.mercantileelectric.com

Phone : 2208 9295
 2206 2688
 Telefax : 2206 0951
 Intercom : *600



PROXIMITY SWITCH Less : %

"XTRA" CONTROL SYSTEM PROXIMITY SWITCH & PHOTO CELL



INDUCTIVE PROXIMITY (DC TYPE)

A DIA.	B LENGTH	C SESING	D WIRE	RATE
6.5 F	45	1 mm	3 Mt.	950
8 F	35	1 mm	3 Mt.	750
8 F	45	1 mm	3 Mt.	500
12 F	40	2 mm	3 Mt.	425
12 F	50	2 mm	3 Mt.	370
12 F	65	2 mm	3 Mt.	370
12	40	4 mm	3 Mt.	425
12	50	4 mm	3 Mt.	370
12	65	4 mm	3 Mt.	370
18 F	25	5 mm	2 Mt.	500
18 F	50	5 mm	2 Mt.	470
18 F	65	5 mm	2 Mt.	370
18	25	8 mm	2 Mt.	500
18	50	8 mm	2 Mt.	470
18	70	8 mm	2 Mt.	370
24 F	65	10 mm	2 Mt.	400
30 F	55	12 mm	2 Mt.	430
30	70	15 mm	2 Mt.	430
36/38 F	55	15 mm	2 Mt.	600
36/38	65	20 mm	2 Mt.	600
50 F	55	20 mm	2 Mt.	1075
50	70	25 mm	2 Mt.	1075

INDUCTIVE PROXIMITY (DC TYPE)
 3 Wire 10 to 30 V DC
 400 / 200 MA / NPN / PNP / NO

OPTICAL SENSOR WITH AMPLIFIER BOX

THROUGH BEAM :

M12 Range 2 Mt.
 M 18 Range 5 Mt.
 M 30 Range 20 Mt.


AMPLIFIER

230 V AC 1 No + Nc Relay O/P
 Delay On & Off
 Available 0-10 Sec. to 180 Sec.

RETRO REFLEX WITHOUT REFLECTOR

M 8 Range 10 mm.
 M 12 Range 30 mm.
 M 18 Range 100 mm.
 M 30 Range 200 mm.

AMPLIFIER AS ABOVE.



OPTICAL BUILT IN AMPLIFIER (DC)

3 WIRE DC.

M12 Range 30 mm.
 M 18 Range 100 mm.
 M 30 Range 200 mm.

10-30 V DC 400 MA PNP / NPN / NO

NAMUR PROXIMITY

8.2 V DC 2 WIRE


M12 / M18 / M30 & Different Shape
 24 V DC 2 Wire

Normally Close (NC)

Provided by 10% extra price

Price can be change without prior notice

Packing Forwarding and Taxes Extra. 12.5 %



INDUCTIVE PROXIMITY (AC TYPE)


A DIA.	B LENGTH	C SESING	D WIRE	RATE
12 F	75	2 mm	2 Mt.	615
12	80	4 mm	2 Mt.	615
18 F	65	5 mm	2 Mt.	450
18	75	8 mm	2 Mt.	450
24	70	10 mm	2 Mt.	475
30 F	55	12 mm	2 Mt.	500
30	65	15 mm	2 Mt.	500
36/38 F	55	15 mm	2 Mt.	600
36/38	65	20 mm	2 Mt.	600
50 F	55	20 mm	2 Mt.	1075
50	65	25 mm	2 Mt.	1075

INDUCTIVE PROXIMITY (AC TYPE)
 2 Wire 90 to 250 V AC
 200 MA / NO / NC



INDUCTIVE PROXIMITY (AC TYPE)

A DIA.	B LENGTH	C SESING	D WIRE	RATE
18	75	10 mm	2 Mt.	850
30	75	15 mm	2 Mt.	950

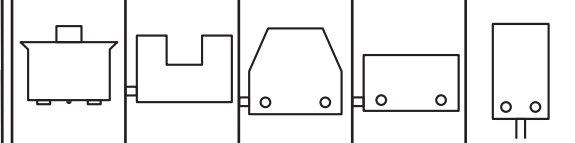

- >>> Proximity switch available in Bakelite Housing & Brass Nickel plated body with two lock nuts & LED indication.
- >>> Inductive / Capacitive / Optical / Namur / Magnetic.
- >>> DC - 2 Wire / 3 Wire / 4 Wire I AC - 2 Wire / 3 Wire.
- >>> Standard Tubular Shape, Odd Shapes & Size, Import Substitute Models.
- >>> Built in Connector Plug & Socket.
- >>> Different Shape Can be provided like as Block type / Square Type / Button / Rectangle / V Shape / Slot / Multi head Type.

AUTHORISED DEALERS :

dowell's
LUGS
GLANDS
TOOLS

COMET
INDUSTRIES
COSMOS
Cable Glands

Jainson
Crimping Tools
SFX
P.V.C. Channel

XTRA
Nylon Cable Ties / S.S. Cable Tie (SS)
PG Glands / Tools / Lugs

CEE
Plug Socket
SURAJ
STRIP CONNECTOR

Control System
Proximity Switch &
Photocell Sensor

CRC
DC 2-26